
ASSEMBLY INSTRUCTIONS

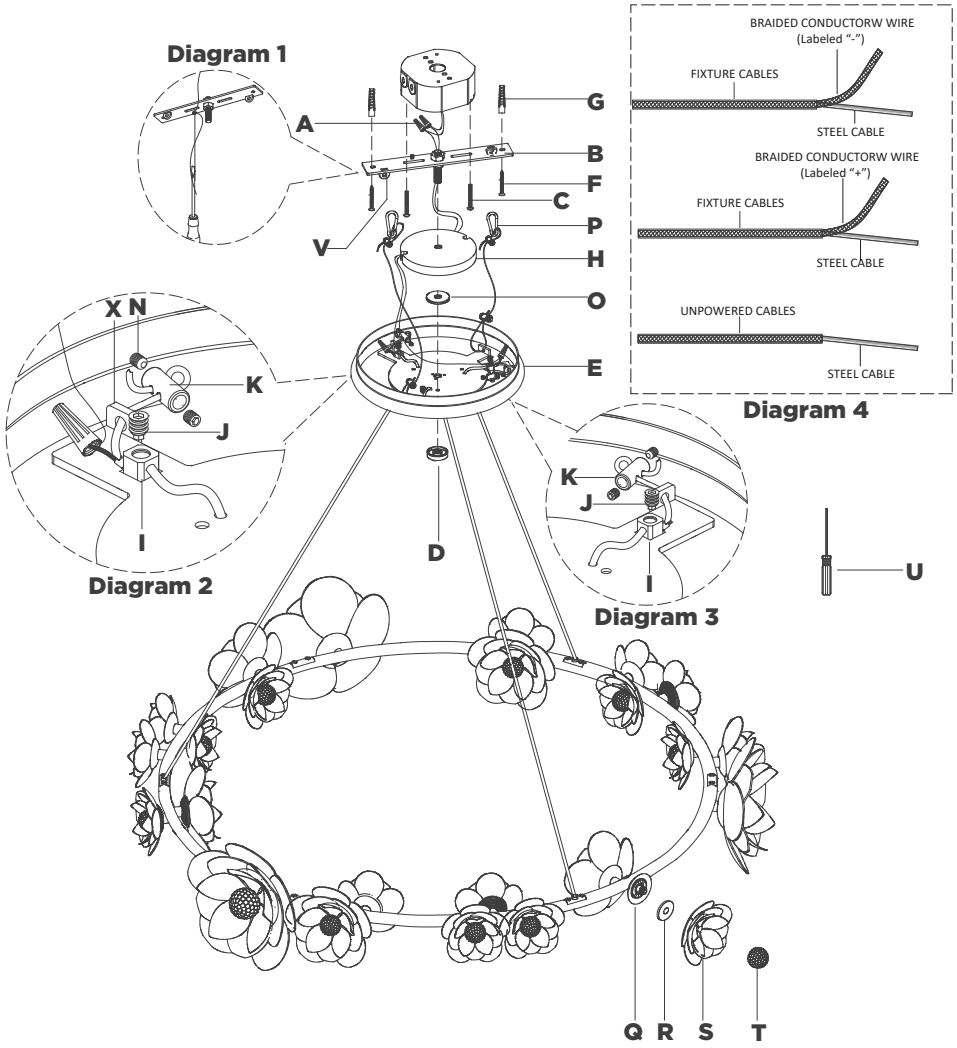

Petaluma 35" Ring Chandelier

Item # BBL5302

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Wire Cutters	Measuring Tape	Hammer
Pencil	Drill	

PERSONS REQUIRED: Two

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(B)** from canopy **(E)** by removing cap nut **(D)**.
3. Using mounting plate **(B)** as a guide, line up with the junction box and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(G)** into the holes using a hammer.
5. Install mounting plate **(B)** to the junction box and secure with mounting screws **(C)**, then secure wood screws **(F)** to anchors **(G)**.
6. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.
   NOTE: It is imperative that the fixture is grounded.
7. Connect driver **(H)** input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
8. Connect driver **(H)** input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.
   CAUTION: Do not reverse the hot and neutral connections.

ASSEMBLY INSTRUCTIONS

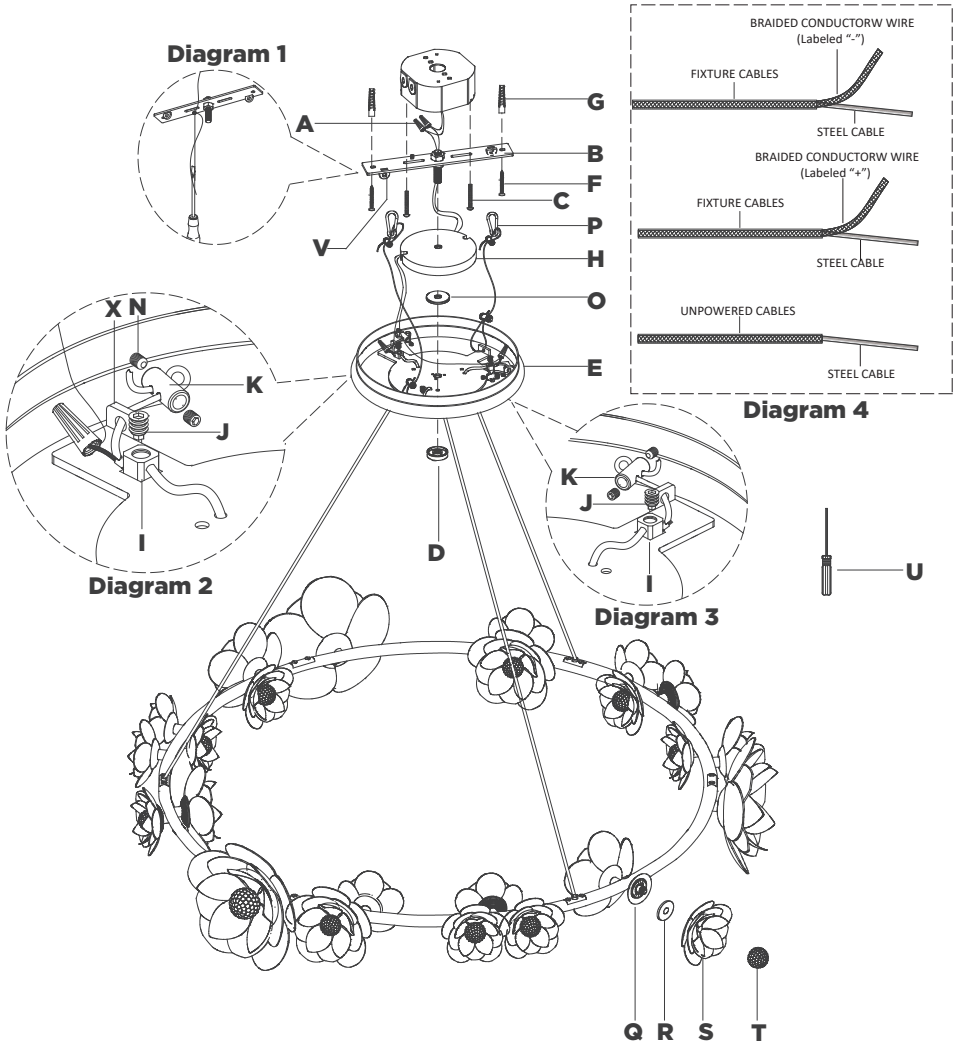

Petaluma 35" Ring Chandelier

Item # BBL5302


NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

---

9. Install driver **(H)** to threaded nipple on center of mounting plate **(B)** and secure with check ring **(O)**.
10. Gently set fixture on a flat, non-abrasive surface to assemble and adjust fixture hanging wires.
11. Feed fixture cables through the holes of canopy **(E)**, then install fixture cables to wire strain relief **(I)** and secure with set screws **(J)** using provided screwdriver **(U)** (see diagram 2 & 3).
12. Adjust fixture cables to desired height and level fixture.
    NOTE: Double check height and ensure fixture is level before moving to next step.
13. After fixture height is achieved shorten wires by using a pair of cutters, leaving enough wire to connect to driver **(H)**.
14. Remove outer housing of two wires (marked "+" & "-") by making a neat cut all the way around, about 4" from the end. Once cut is made, remove and discard the 4" piece of housing, exposing the electrical wires.
15. Peel back the wire strands and separate it from the inner steel cables and separate wire strands. Cut excess wire strands, being sure to leave 5/8" for wiring (see diagram 4).
16. Feed steel cables to wire strain reliefs **(X)**, then loosen cable locks **(K)** and install to end of two steel cables. Insert other end of cables through the cable lock **(K)** and tighten ends **(N)** with a screwdriver to secure (see diagram 2).

ASSEMBLY INSTRUCTIONS

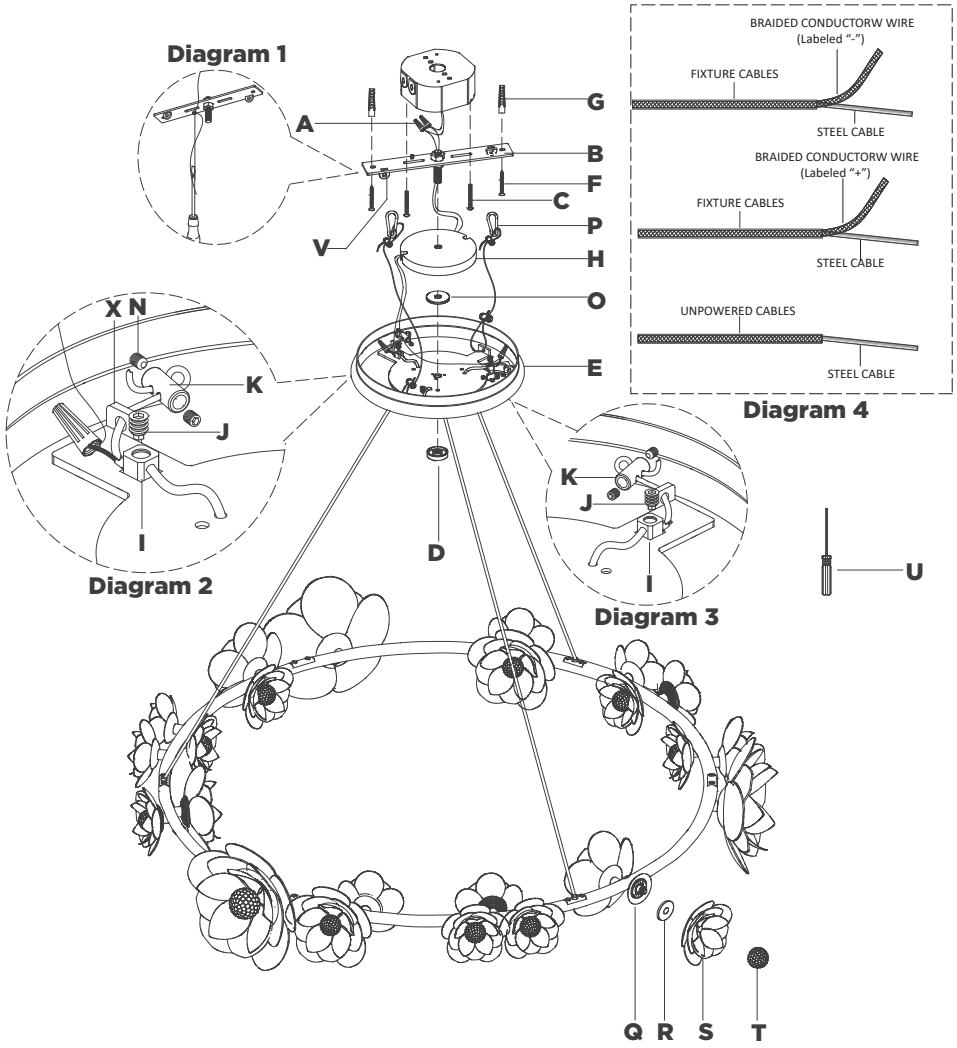

Petaluma 35" Ring Chandelier

Item # BBL5302


NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

---

17. Remove outer housing of unpowered cable by making a neat cut all the way around, about 4" from the end. Once cut is made, remove and discard the 4" piece of housing, exposing the electrical wires.
18. Peel back the wire strands and separate it from the inner steel cable, then cut wire stands (see diagram 4).
19. Feed steel cable to wire strain relief **(X)**, then loosen cable lock **(K)** and install to end of steel cable. Insert other end of cable through the cable lock **(K)** and tighten ends **(N)** with a screwdriver to secure (see diagram 3).
    NOTE: It is recommended to have a helper assist in supporting the fixture for step 20.
20. Hang hooks **(P)** to loops **(V)** on bottom of mounting plate **(B)**.
21. Connect fixture neutral wire strands (marked "-") to driver **(H)** output wire (black) using wire nut **(A)** (see diagram 2).
22. Connect fixture hot wire strands (marked "+") to driver **(A)** output wire (red) using wire nut **(A)**.
    CAUTION: Do not reverse the hot and neutral connections.
23. Install canopy **(E)** to threaded nipple on center of mounting plate **(B)** and secure with cap nut **(D)**.

ASSEMBLY INSTRUCTIONS

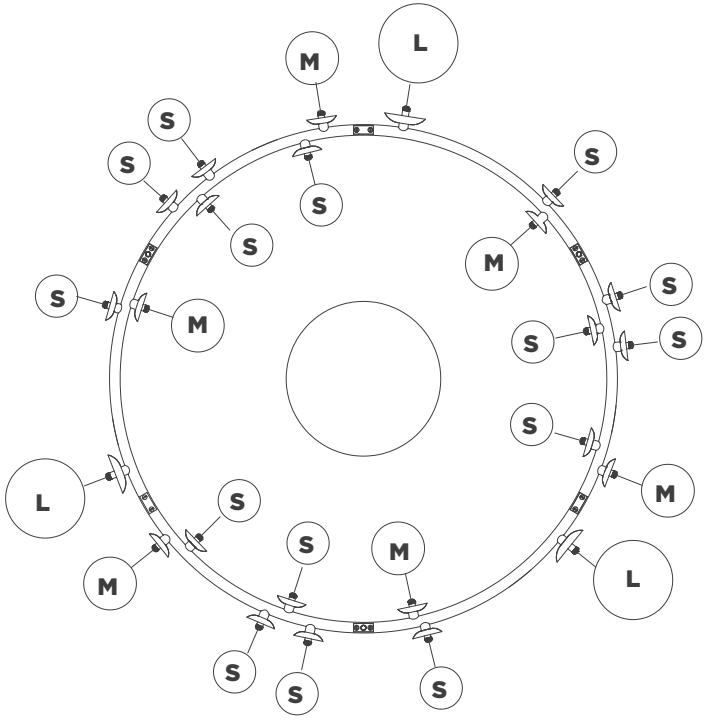

Petaluma 35" Ring Chandelier

Item # BBL5302

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

---

24. Remove protective caps **(R)** from light source bases **(Q)**, then install shades to light source bases **(Q)** and secure with finials **(T)** as shown in digram.
    NOTE: Discard protective caps **(R)** after assembly.
    NOTE: Do not overtighten otherwise glass shade could be damaged.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.