
CAUTION – RISK OF SHOCK –
Disconnect Power at the main circuit breaker panel or main fusebox before starting and during the installation.

1) Slip fixture over post and mark position of mounting holes in post.
2) Remove fixture from post.
3) Drill 3/16" dia holes in post at positions marked .
4) If fixture is provided with ground wire, connect fixture ground wire to outlet box ground wire with wire connector. (Not provided). Never connect ground wire to black or white power supply wires.
5) Grounding instructions: (See Illus. A or B).
   A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
   B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.


   If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector. (Not provided.) After following the above steps. Never connect ground wire to black or white power supply wires.

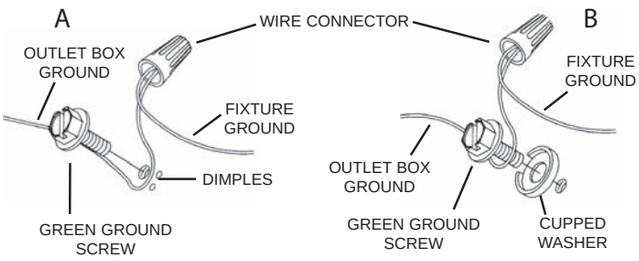


6) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



7) Slip fixture over post and secure in place using provided screws**[1]**. Screws should slip into holes drilled in post.
8) Insert recommended bulb(s) (Not supplied).
9) Carefully lower the fixture roof**[2]** over the bracket. Align the holes inside the fixture roof with the holes on the bracket.
10) From under the fixture roof, thread a screw**[3]** into each hole of the bracket and into the threads in the roof.Tighten screws to secure in place.

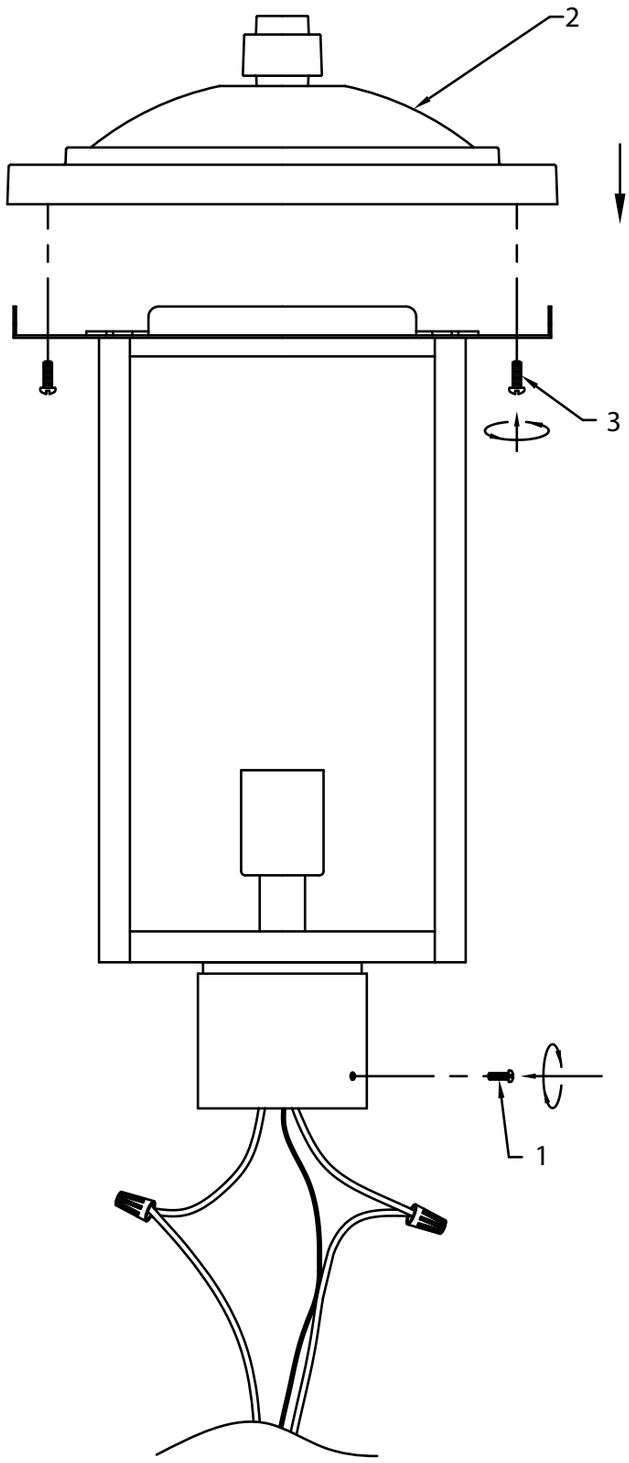

KICHLER

INSTRUCTIONS
For Assembling and Installing Fixtures in Canada
Pour L'assemblage et L'installation Au Canada


Nous sommes là pour vous aider 866-558-5706
Heures : du lundi au vendredi, de 9h à 17h (heure de l'Est)

ATTENTION – RISQUE DE DÉCHARGES ÉLECTRIQUES - Couper le courant au niveau du panneau du disjoncteur du circuit principal ou de la boîte à fusibles principale avant de procéder à l'installation.

1) Passer le luminaire par dessus le support et marquer un repère pour les trous de montage sur le support.
2) Enlever le luminaire du support.
3) Percer des trous de 1/8 po sur chacun des repères du support.
4) Si luminaire est fourni a vec un fil de mise à la terre, le connecter à la boîte de sortie de courant de mise à la terre avec un serre-fils (non fourni). Ne jamais connecter un fil de mise à la terre aux fils d'alimentation noir ou blanc.
5) Connecter les ls. Se porter au tableau ci-dessous pour faire les connexions.

Connecter le fil noir ou rouge de la boite	Connecter le fil blanc de la boîte
A Noir	A Blanc
*Au cordon parallèle (rond et lisse)	*Au cordon parallele (à angles droits el strié)
Au bransparent, doré, marron, ou noir sans fil distinctif	Au transparent, doré, marron, ou noir avec un til distinctif
Fil isolé (sauf fil vert) avec conducteur en cuivre	Fil isolé (sauf fil vert) avec conducteur en argent

*Remarque: Avec emploi d'un fil paralléle (SPT I et SPT II). Le fil neutre est á angles droits ou strié et l'autre fil doit étre rond ou lisse (Voir le schéma).



6) Faire glisser le luminaire sur le support et fixer à l'aide des vis**[1]**. Les vis doivent s'ajuster correctement dans les trous du support.
7) Installer la ou les ampoules recommandées (non fournies).
8) Abaisser avec précaution le toit de fixation **[2]** sur le support. Alignez les trous à l'intérieur du toit avec les trous sur le support.
9) En dessous du toit, enfilez une vis **[3]** dans chaque trou du support et dans les filets du toit. Serrez les vis pour fixer en place.

