ASSEMBLY INSTRUCTIONS

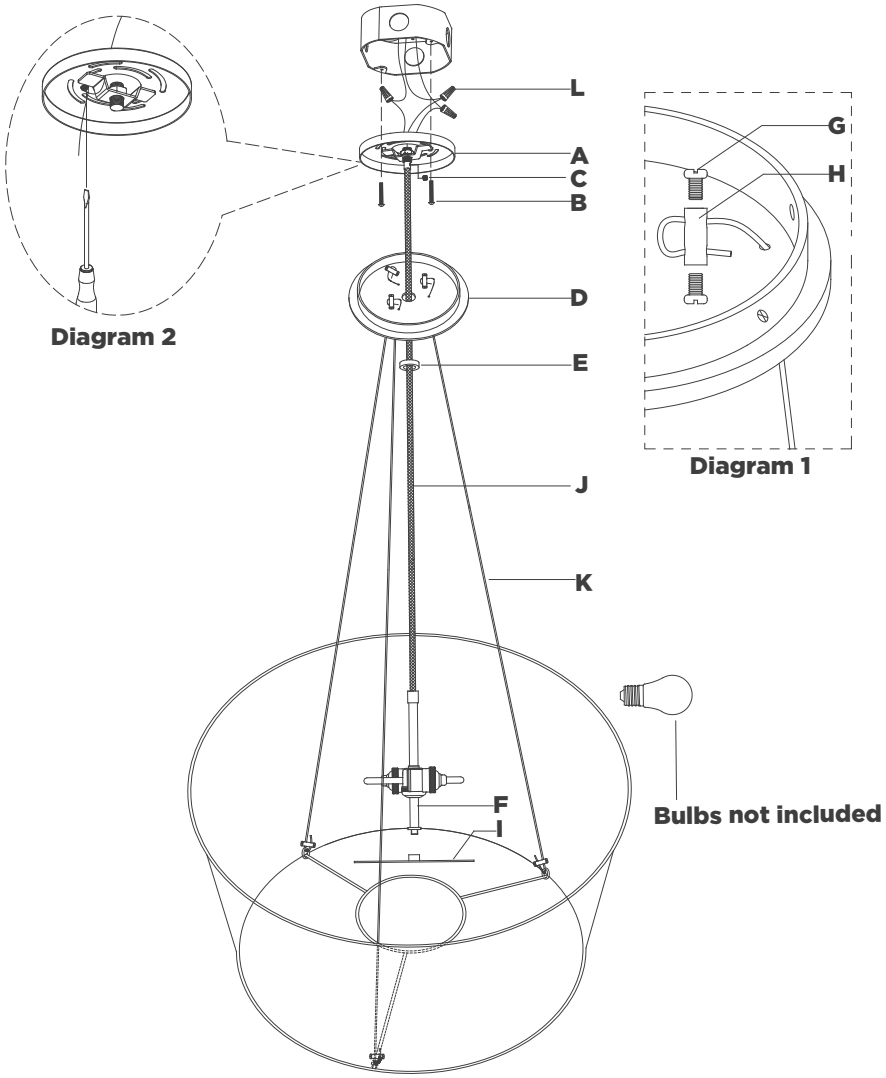


Diagram 2

Diagram 1

Hoop Medium

Item # BBL5115

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver Slotted Screwdriver Wire Strippers

Wire Cutters

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(A)** from canopy **(D)** by removing collar ring **(E)**.
3. Install mounting plate **(A)** to junction box and secure with mounting screws **(B)**.
4. Gently set fixture on a flat, non-abrasive surface to assemble and adjust fixture hanging wires.
5. Route three hanging cables **(K)** through holes on canopy **(D)**. Loosen cable lock **(H)** and install to end of hanging cables. Insert other end of cables through the cable lock and adjust to desired length. Once complete re-secure screws **(G)**. Repeat steps with the remaining wires (see diagram 1).

   NOTE: Double check height and ensure fixture is level before moving to next step.
6. Feed fixture wires through collar ring **(E)** and canopy **(D)** then insert fixture wires through the center hole of mounting **(A)** bracket and secure with set screw **(C)**.

   NOTE: Make sure there is no tension on the electrical wire when fixture is fully extended.

ASSEMBLY INSTRUCTIONS

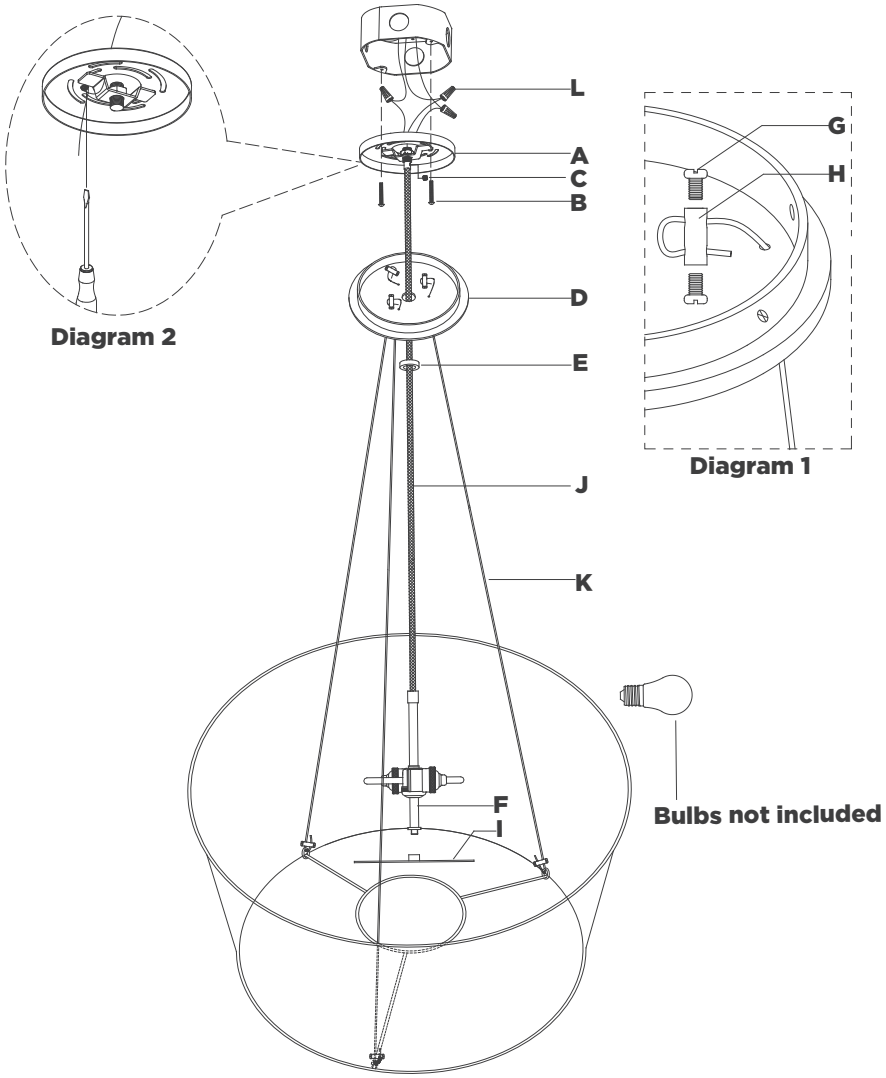


Diagram 2

Diagram 1

Hoop Medium

Item # BBL5115

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

---

7. After fixture height is achieved shorten the wires by using a pair of cutters (not included), leaving enough length to reach junction box.
8. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 2). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut **(L)**.
   NOTE: It is imperative that the fixture is grounded.
9. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut **(L)**.
10. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut **(L)**.
    CAUTION: Do not reverse the hot and neutral connections.
11. Make sure all wire connections are tight, then carefully tuck into the junction box.
12. Install canopy **(D)** to mounting plate **(A)** and secure with screws **(E)**.
13. Install light bulbs into the sockets.
14. Thread end cap **(I)** to threaded nipple **(F)**.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.