ASSEMBLY INSTRUCTIONS

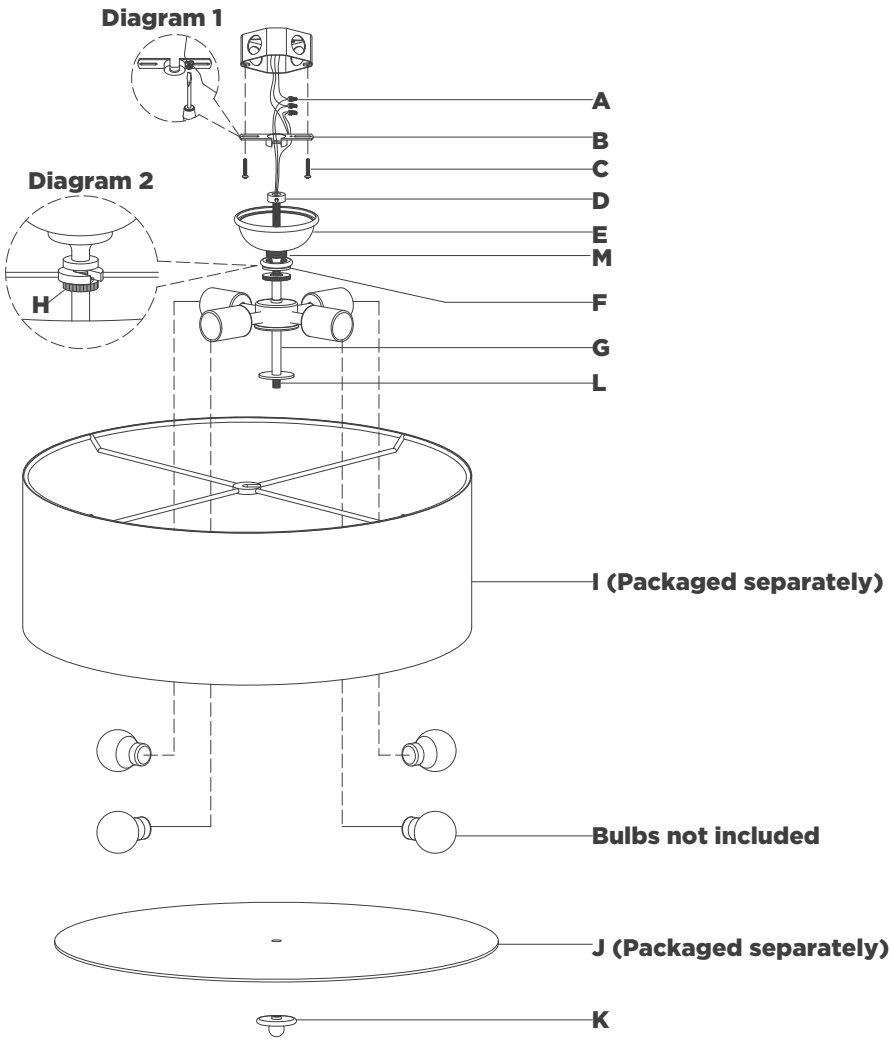

Cheever 26" Flush Mount

Item # SCH4007

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver Slotted Screwdriver

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Install mounting plate **(B)** to the junction box and secure with mounting screws **(C)**.
3. Wrap supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.
4. Secure collar loop **(M)** to threaded nipple using pliers to tighten locknut.
5. Hang fixture fixed mount **(D)** to center of mounting plate **(B)**.
6. Connect fixture ground wire (bare copper) and connect to supply ground wire (usually green or bare copper) using wire nut **(A)**.
   NOTE: It is imperative that the fixture is grounded.
7. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
8. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.
   CAUTION: Do not reverse the hot and neutral connections.
9. Make sure all wire connections are tight, then carefully tuck into the junction box.
10. Install canopy **(E)** to mounting plate **(B)** and secure with collar ring **(F)**.

ASSEMBLY INSTRUCTIONS

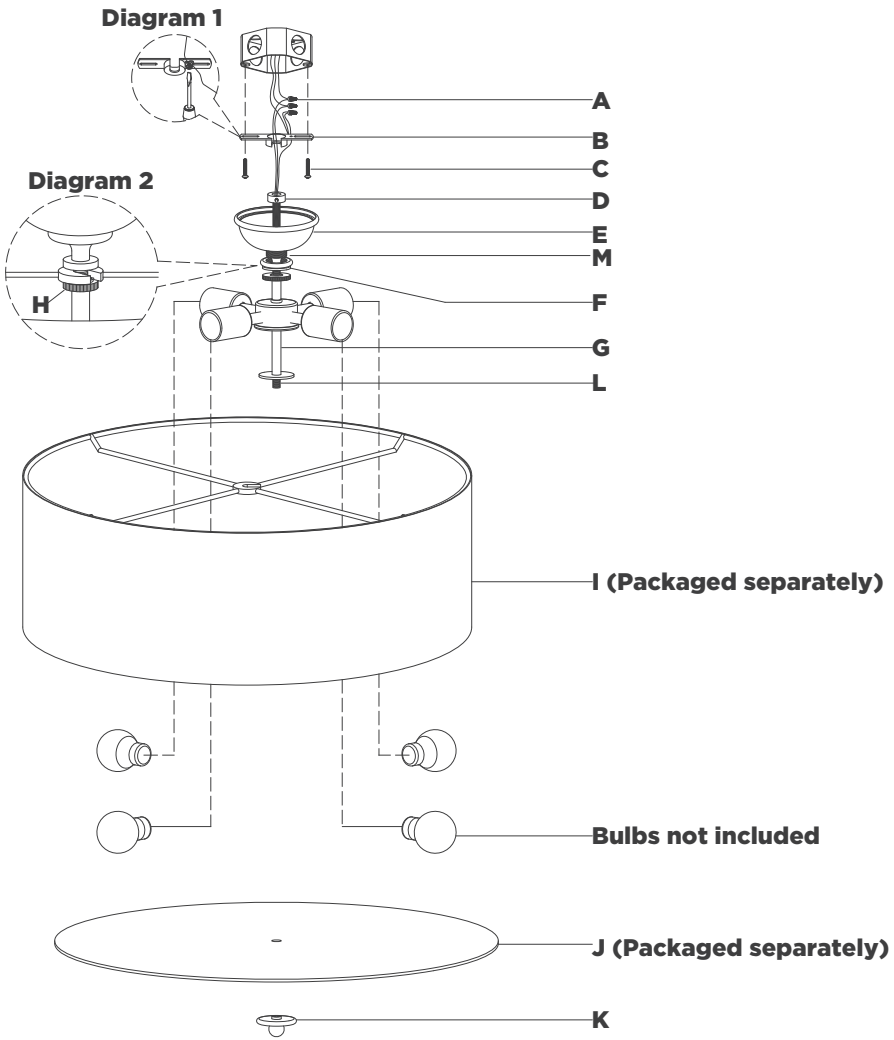

Cheever 26" Flush Mount

Item # SCH4007

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

---

11. Install shade **(I)** split washer above knurled ring **(H)** and secure by screwing tight (see diagram 2).

    NOTE: If shade has additional packaging, carefully cut from interior of shade to avoid damage.
12. Install light bulbs into the sockets.
13. Install diffuser **(J)** to threaded nipple **(L)** and secure with finial **(K)**.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.