
ASSEMBLY INSTRUCTIONS

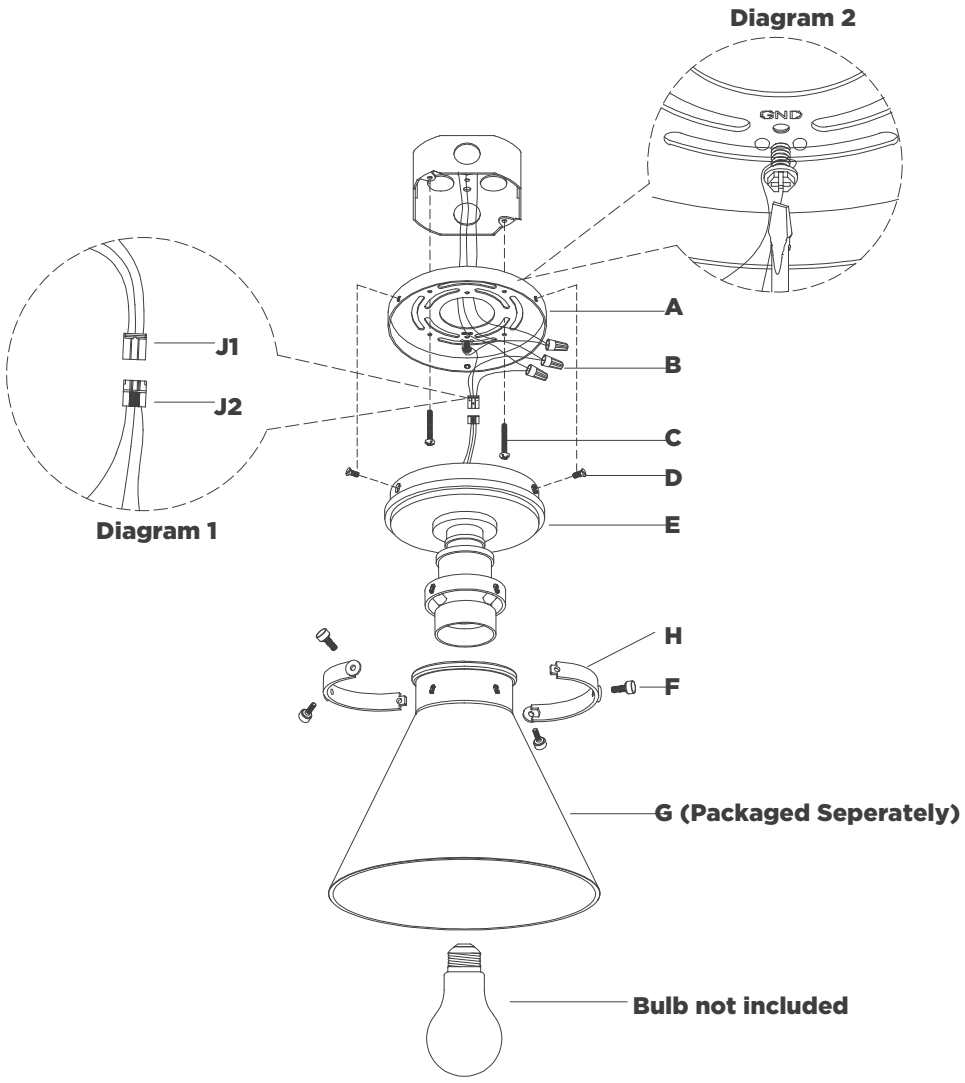

Parkington 9″ Conical Flush Mount

Item # CHC4525

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver Slotted Screwdriver

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(A)** from fixture **(E)** by removing screws **(D)**.
3. Install mounting plate **(A)** to the junction box and secure with mounting screws **(C)**.
4. Remove quick connector **(J1)** from fixture (see diagram 1).
5. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut **(B)**.
   NOTE: It is imperative that the fixture is grounded.
6. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut **(B)**.
7. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut **(B)**.
   CAUTION: Do not reverse the hot and neutral connections.
8. Make sure all wire connections are tight, then carefully tuck into the junction box.
9. Connect quick connectors **(J1 & J2)** together (see diagram 1).
10. Install fixture **(E)** to mounting plate **(A)** and secure with screws **(D)**.

ASSEMBLY INSTRUCTIONS

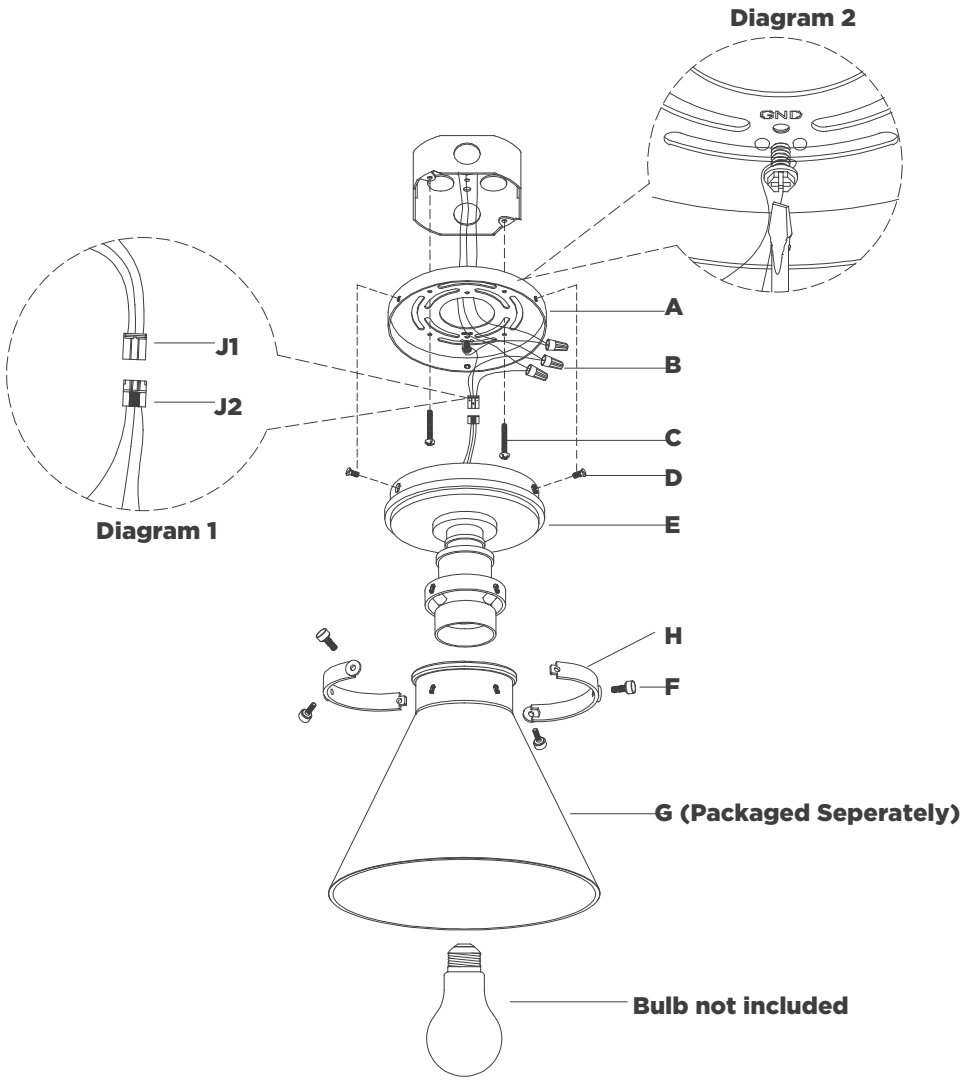

Parkington 9″ Conical Flush Mount

Item # CHC4525

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

---

11. Remove thumbscrews **(F)** and metal rings **(H)** from fixture **(E)**, then install shade **(G)** to fixture **(E)** and secure with metal rings **(H)** using thumbscrews **(F)**.
    NOTE: Do not overtighten otherwise glass could become damaged.
12. Install light bulb into the socket.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.