ASSEMBLY INSTRUCTIONS

Flush Mount Option

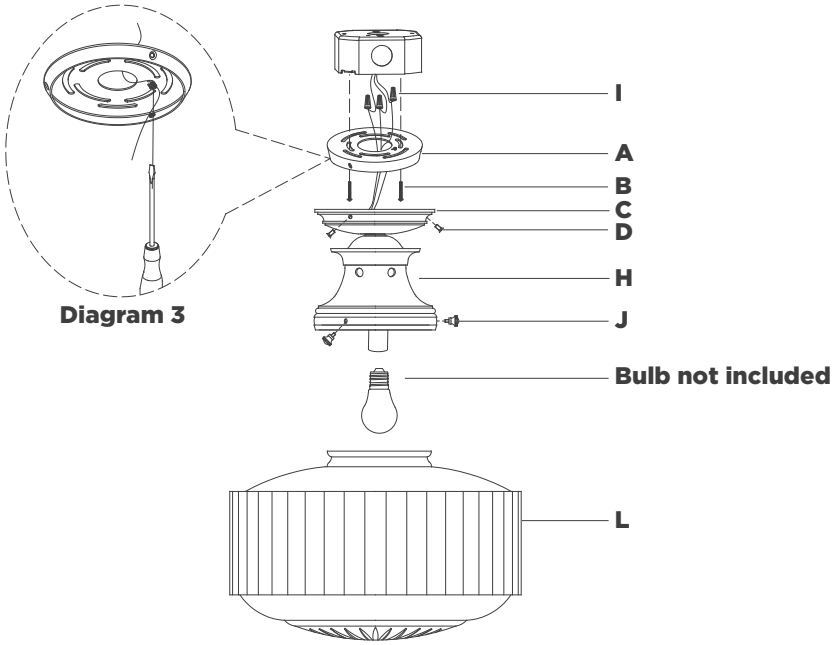


Diagram 3

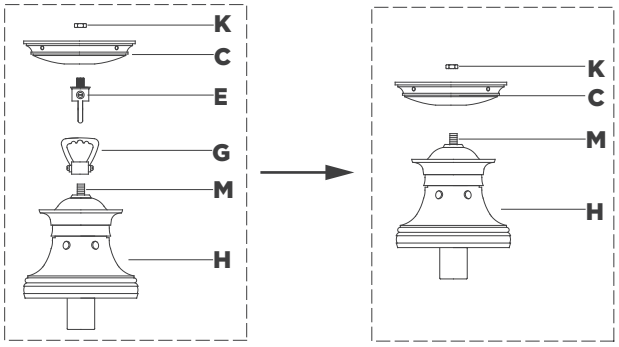


Diagram 1

Diagram 2

Milton Road Flush Mount

Item # TOB5150

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver Slotted Screwdriver

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(A)** from canopy **(C)** by removing screws **(D)**.
3. Install mounting plate **(A)** to the junction box and secure with mounting screws **(B)**.
4. Remove fixture loop **(G)** from fixture **(H)**. Then remove collar loop **(E)** from canopy **(C)** by unscrewing screw **(K)** (see diagram 1).
   NOTE: Fixture loop **(G)**, collar loop **(E)**, screw **(K)** and chain will be not be used for flush mount assembly. Keep parts and store for future use.
5. Install canopy **(C)** to fixture **(H)** by securing hex nut **(K)** to nipple **(M)** (see diagram 2).
6. Cut excess wires, being sure to leave enough to reach the junction box.
7. Separate two sides of molded wire, and strip insulation on each 5/8″.
8. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 3). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut **(I)**.
   NOTE: It is imperative that the fixture is grounded.

ASSEMBLY INSTRUCTIONS

Flush Mount Option

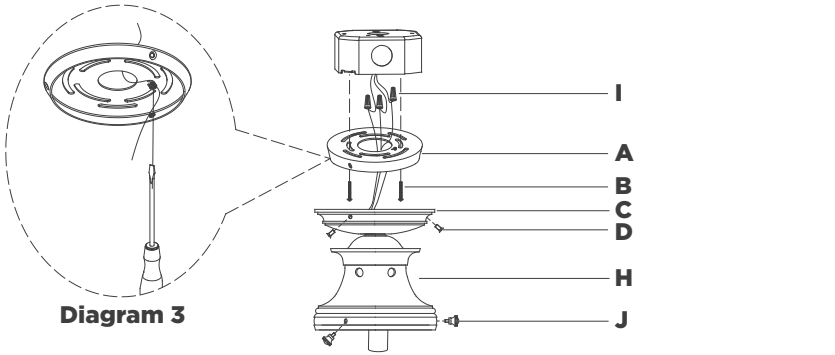


Diagram 3

Diagram 1





Diagram 2



Milton Road Flush Mount

Item # TOB5150

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

---

9. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut **(I)**.
10. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut **(I)**.
    CAUTION: Do not reverse the hot and neutral connections.
11. Make sure all wire connections are tight, then carefully tuck into the junction box.
12. Install canopy **(C)** to mounting plate **(A)** and secure with screws **(D)**.
13. Install light bulbs into the sockets.
14. Remove thumbscrews **(J)** for fixture **(H)**, then install glass shade **(L)** to fixture **(H)** and secure with thumbscrews **(J)**.
    NOTE: Do not overtighten otherwise glass shade could be damaged.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

ASSEMBLY INSTRUCTIONS

Pandant Option

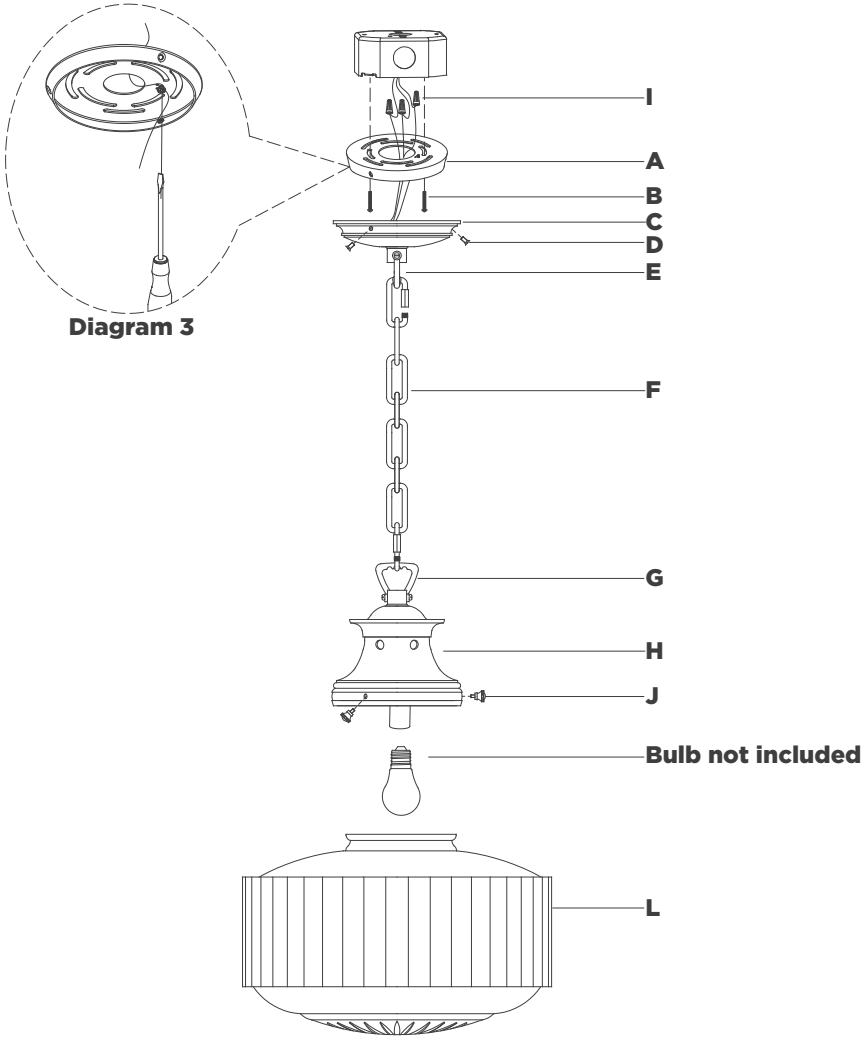


Diagram 3

Milton Road Flush Mount

Item # TOB5150

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Slip Joint Pliers	Measuring Tape	Chain Pliers
Wire Cutters		

---

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(A)** from canopy **(C)** by removing screws **(D)**.
3. Install mounting plate **(A)** to the junction box and secure with mounting screws **(B)**.
4. Determine desired overall length, and amount of chain **(F)** needed. Shorten chain using chain pliers. (Keep extra chain)
5. Attach chain **(F)** to canopy loop **(E)** and to fixture loop **(G)** using quick links **(M)**. Secure quick links **(M)**.
6. Thread fixture wire and ground wire through chain **(F)**.
   NOTE: When you reach the collar loop **(E)**, ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box.
7. Separate two sides of molded wire, and strip insulation on each 5/8".
8. Twist all fixture wires together, and slip through center hole of canopy **(C)**.
   NOTE: Untwist wires and separate to prepare for connection.

ASSEMBLY INSTRUCTIONS

Pandant Option

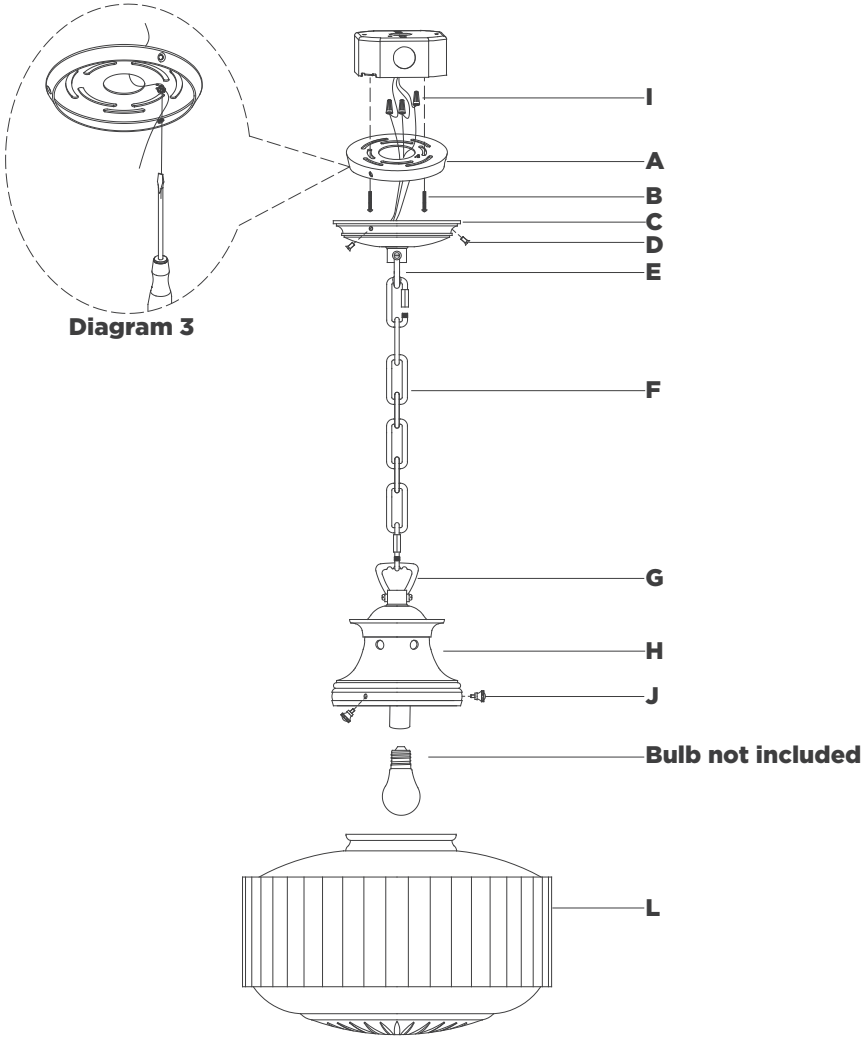


Diagram 3

Milton Road Flush Mount

Item # TOB5150

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

---

9. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 3). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut **(I)**.
   NOTE: It is imperative that the fixture is grounded.
10. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut **(I)**.
11. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut **(I)**.
    CAUTION: Do not reverse the hot and neutral connections.
12. Make sure all wire connections are tight, then carefully tuck into the junction box.
13. Install canopy **(C)** to mounting plate **(A)** and secure with screws **(D)**.
14. Install light bulb into the socket.
15. Remove thumbscrews **(J)** for fixture body **(H)**, then install glass shade **(L)** to fixture body **(H)** and secure with thumbscrews **(J)**.
    NOTE: Do not overtighten otherwise glass shade could be damaged.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.